


PART No.3 DETAIL DRAWING

FOR	3-WIRE LEVEL TRANSMITTER (OUTPUT SIGNAL CURRENT)
MOUNTING	TOP
ENCLOSURE	WEATHER PROOF
MAX. PRESSURE	ATM kgf/cm ²
MAX. TEMP.	80 °C
POWER SUPPLY	DC 24V
OUTPUT SIGNAL	DC 4 ~ 20mA

NO.	DESCRIPTION	MATERIAL	REMARK
1	HEAD	POLYAMIDE	
2	BODY	P.P	
3	ADJUSTABLE PROCESS CONN.	<input checked="" type="checkbox"/> TEFLON <input type="checkbox"/> P.P	CLAMP TYPE
4	GUIDE PIPE	316L SS	TEFLON LINED
5	FLOAT	<input checked="" type="checkbox"/> TEFLON <input type="checkbox"/> P.P	
6	STOPPER	TEFLON	
7	NAME LABEL	P.P FILM	

PROCESS CONN. MATERIAL/øB	FLOAT SIZE	GUIDE PIPE
<input checked="" type="checkbox"/> TEFLON / ø32	ø28xH28	ø8
<input type="checkbox"/> PP / ø32	ø28xH30	ø8

WIRING DIAGRAM

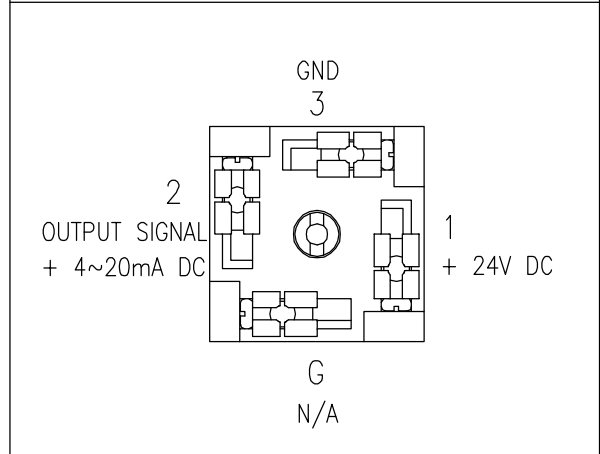

TAG NO.	Q'TY	L

NOTE
1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED.

△					
△					
△					
△	NOV. 2017	1ST ISSUE	D Y KIM	B S SUNG	Y H KIM
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

HITROL HITROL CO., LTD.

TITLE
MAGNETO STRICTIVE TYPE
LEVEL TRANSMITTER
HT-3WMS

SCALE	UNIT	SHEET NO.
N.S	mm	
PROJECT		
DRAWING NO.		
HT3WMS-AA-01		

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party permission without our written permission.