

FOR	TWO-PART TYPE LEVEL SWITCH		
MOUNTING	TOP & SIDE, SCREW		
ENCLOSURE	WEATHER PROOF (IP65)		
MAX. PRESSURE	20	kgf/cm ²	
MAX. TEMP	150	°C	


CONTROL UNIT	
MODEL NO. : HLC-95R	PANEL TYPE(STD.) LOCAL TYPE

CABLE ENTRY	PF 3/4"(F) <input type="checkbox"/>
-------------	--

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	ALC	
2	BASE	ALC	
3	PROCESS CONN.	316L SS	
4	INACTIVE ROD	316L SS	$\phi 25.4$
5	INSULATION	TEFLON	1 t
6	SENSING PROBE	316L SS	$\phi 12.7$
7	COOLING FIN	304 SS	

PROCESS CONN. SIZE	
<input type="checkbox"/>	PT 1" SCREW
<input type="checkbox"/>	

TAG. NO.	QT'Y	L1	L

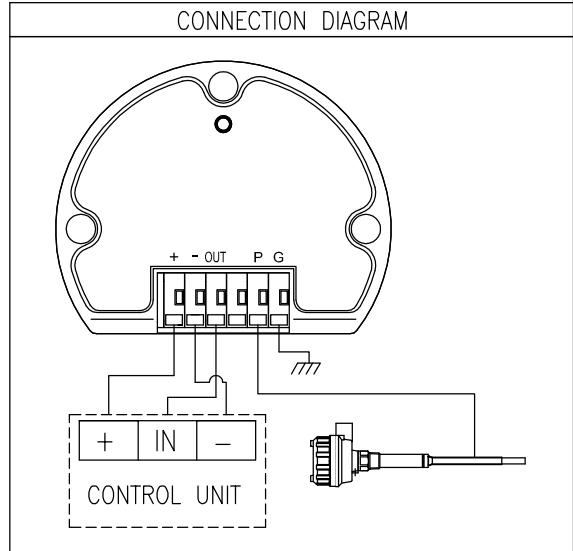

NOTE
1. GENERAL TOLERANCE ± 3 mm EXCEPT AS NOTED.

	.	.				HITROL CO., LTD.	SCALE N.S	UNIT mm	SHEET NO. /
	.	.					TITLE CAPACITANCE TYPE LEVEL SWITCH FOR SOLIDS HCC-95RH	PROJECT	
	FEB. 2018	1ST ISSUE	D Y KIM	B S SUNG	Y H KIM		DRAWING NO. HCC95RH-A-01		
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY				

This drawing is the property of HITROL and shall not be copied, communicated, or given for tiers except with our written permission. This drawing is version 1.1 at last modify JAN, 2016