

| | | | |
|---------------|------------------------------|---------------------|--|
| FOR | TWO-PART TYPE LEVEL SWITCH | | |
| MOUNTING | TOP & SIDE, SCREW | | |
| ENCLOSURE | EX-PROOF (Ex d IIC T4, IP65) | | |
| MAX. PRESSURE | 20 | kgf/cm ² | |
| MAX. TEMP | 150 | °C | |


| | |
|---------------------|--------------------------------|
| CONTROL UNIT | |
| MODEL NO. : HLC-95R | PANEL TYPE(STD.) LOCAL TYPE |

| | |
|-------------|--|
| CABLE ENTRY | PF 3/4"(F) <input type="checkbox"/> |
|-------------|--|

| NO. | DESCRIPTION | MATERIAL | REMARK |
|-----|---------------|----------|--------|
| 1 | COVER | ALC | |
| 2 | BASE | ALC | |
| 3 | PROCESS CONN. | 316L SS | |
| 4 | INACTIVE ROD | 316L SS | Ø27.2 |
| 5 | INSULATION | TEFLON | 1 t |
| 6 | SENSING PROBE | 316L SS | Ø12.7 |
| 7 | COOLING FIN | 304 SS | |

| | |
|--------------------------|-------------|
| PROCESS CONN. SIZE | |
| <input type="checkbox"/> | PT 1" SCREW |
| <input type="checkbox"/> | |

| TAG. NO. | QTY | L1 | L |
|----------|-----|----|---|
| | | | |
| | | | |
| | | | |

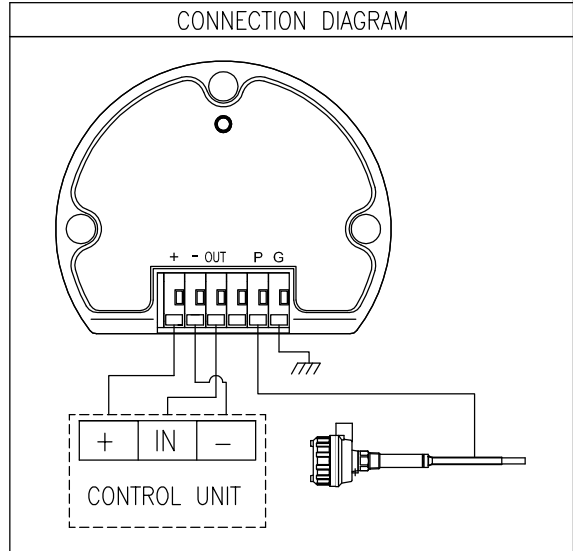

NOTE
1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED

| | | | | | | | | |
|--|--|--|--|--|--|-----------------------------|------------|----------------|
| HITROL CO., LTD. | | | | | | SCALE N.S | UNIT mm | SHEET NO. / |
| TITLE CAPACITANCE TYPE LEVEL SWITCH FOR SOLIDS HPC-95RH | | | | | | PROJECT | | |
| FEB. 2018 1ST ISSUE D Y KIM B S SUNG Y H KIM NO. DATE REVISION REV'D BY CHK'D BY APP'D BY | | | | | | DRAWING NO. HPC95RH-A-01 | | |

This drawing is the property of HITROL and shall not be copied, communicated, or given for tiers except with our written permission.