

NOTE

1. GENERAL TOLERANCE :
±3mm EXCEPT AS NOTED

L1 STD. LENGTH = 200mm
 $L \leq 2500\text{mm}$, $A = 170\text{mm}$, $B = \phi 28$
 $L \leq 4500\text{mm}$, $A = 300\text{mm}$, $B = \phi 28$
 $L \geq 4500\text{mm}$, $A = 300\text{mm}$, $B = \phi 40$

FOR	TWO-PART TYPE LEVEL SWITCH
MOUNTING	TOP , SCREW
ENCLOSURE	EX-PROOF (Ex d IIC T4, IP65)
MAX. PRESSURE	20 kgf/cm ²
MAX. TEMP	150 °C


CONTROL UNIT	
MODEL NO. : HLC-95R	PANEL TYPE(STD.) LOCAL TYPE

CABLE ENTRY	PF 3/4"(F) <input type="checkbox"/>
-------------	--

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	AL.C	
2	BASE	AL.C	
3	PROCESS CONN.	316L SS	
4	INSULATION	TEFLON	1 t
5	ROPE HOLDER	316L SS	
6	ROPE	316L SS	φ8
7	SENSING WEIGHT	316L SS	
8	COOLING FIN	304 SS	

PROCESS CONN. SIZE	
<input type="checkbox"/>	PT 1" SCREW
<input type="checkbox"/>	

TAG. NO.	QTY	L1	L

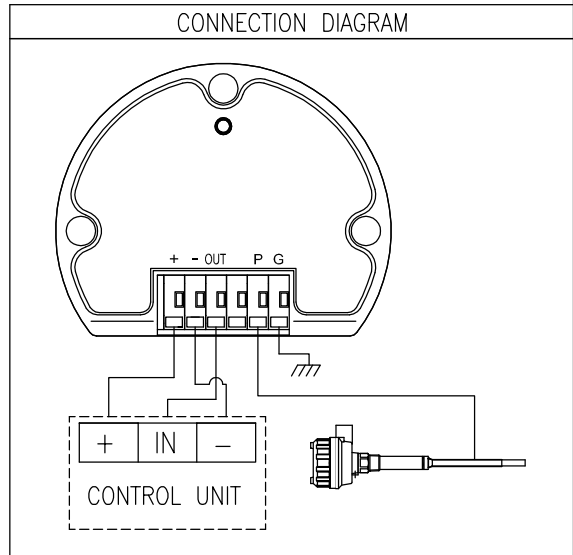

△	.	.			
△	.	.			
△	.	.			
△	.	.			
△	FEB. 2018	1ST ISSUE	D Y KIM	B S SUNG	Y H KIM
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

HITROL HITROL CO., LTD.
 TITLE
**CAPACITANCE TYPE LEVEL SWITCH
 FOR SOLIDS HPC-95RWH**

SCALE	UNIT	SHEET NO.
N.S	mm	/
PROJECT		
DRAWING NO. HPC95RWH-A-01		

This drawing is the property of HITROL and shall not be copied, communicated, or given for tiers except with our written permission