




◆ FRONT VIEW

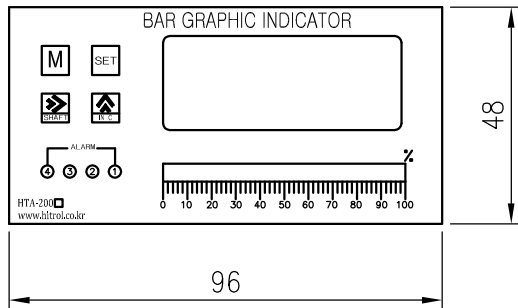


◆ PANEL CUTTING

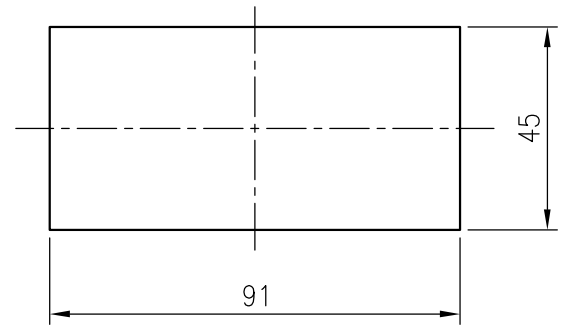

◆ SIDE VIEW

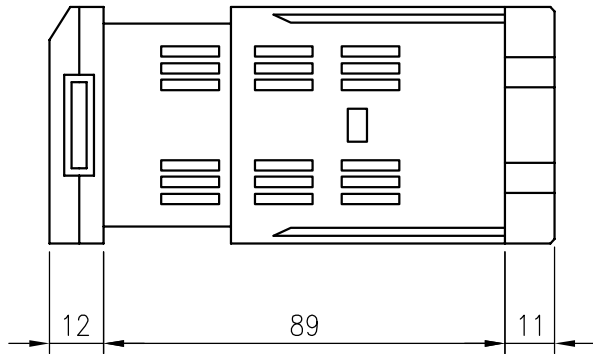

◆ TERMINAL CONNECTION

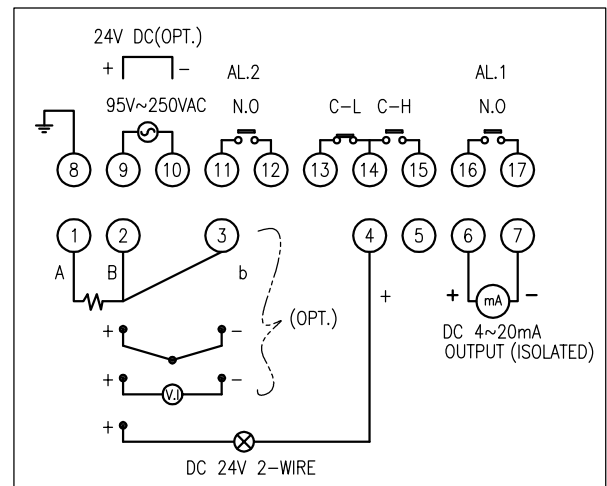

TECHNICAL DATA

WEIGHT		APPROX. 300g					
HOUSING MATERIAL		ABS plastic (black)					
POWER SUPPLY		4VA AC 110/220V(50/60Hz)(Std.)					
INPUT	mA	DC 0~20mA (STD.)					
	kΩ	0~2kΩ (OPT.)					
	V	DC 1~5V (OPT.)					
ALARM 출력	Output	DC 4~20mA, 2-ALARM(2-SPST), 1-CONTROL(1-SPDT)					
	Max, switching power	750 VA, 90W					
	Max, switching voltage	250 V AC, 110V DC					
	Max, switching current	5A					
	Max, switching capacity	3A DC, AC					
△	.	.					
△	.	.					
△	.	.					
△	.	.					
△	MAY. 2018	INFORMATION					
NO.	DATE	REVISION					
HITROL CO., LTD.		SCALE	N.S	UNIT	mm	SHEET NO.	/
		TITLE		PROJECT			
		MULTI BAR GRAPHIC INDICATOR HTA-2003		DRAWING NO. HTA2003-A-01			