


FOR	COMPACT TYPE LEVEL SWITCH	
MOUNTING	TOP or SIDE, SCREW	
ENCLOSURE	<input type="checkbox"/> EX-PROOF (Ex d IIC T6,IP65)	
	<input type="checkbox"/> EX-PROOF(Ex td A21 T90°C,IP65)	
AMBIENT TEMP	-20 ~ +60°C	
MAX. PRESSURE	10	kgf/cm ²
MAX. TEMP	80	°C

CABLE ENTRY	PF 3/4"(F)
	<input type="checkbox"/>

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	AL.C	
2	BASE	AL.C	
3	PROCESS CONN.	<input type="checkbox"/> 304 SS <input type="checkbox"/> 316L SS	
4	TUNING FORK	SCS 14	

PROCESS CONN. SIZE	
<input type="checkbox"/>	PT 1-1/2"(M)
<input type="checkbox"/>	

ELECTRICAL SPECIFICATION		
SWITCH	TYPE	RELAY
	FORM	DPDT
	CONTACT RATING	AC 250V, 5A DC 30V, 5A
POWER SOURCE	AC 90...240V, 50/60Hz DC 24V	

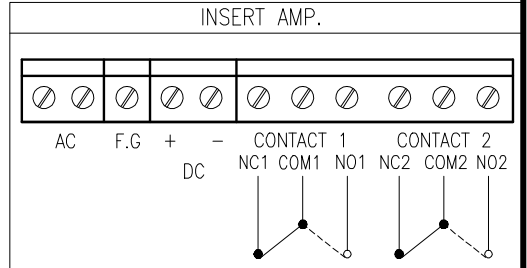

TAG. NO.	Q'TY	REMARK

NOTE
1. GENERAL TOLERANCE $\pm 3\text{mm}$ EXCEPT AS NOTED.

\triangle	. .				
\triangle	. .				
\triangle	. .				
\triangle	. .				
\triangle	Jun. 2018	1ST ISSUE	Y H LEE	B S SUNG	Y H KIM
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

HITROL HITROL CO., LTD.

TITLE
VIBRATION TYPE LEVEL SWITCH
HPV-20N-A

SCALE	N.S	UNIT	mm	SHEET NO.	/
PROJECT					
DRAWING NO. HPV20NA-A-01					

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party permission without our written permission.