


FOR	COMPACT TYPE LEVEL SWITCH
MOUNTING	TOP or SIDE, SCREW
ENCLOSURE	<input type="checkbox"/> EX-PROOF (Ex d IIC T6,IP65)
	<input type="checkbox"/> EX-PROOF(Ex td A21 T130°C,IP65)
AMBIENT TEMP	-20 ~ +60°C
MAX. PRESSURE	10 kgf/cm ²
MAX. TEMP	120 °C

CABLE ENTRY	PF 3/4"(F)
	<input type="checkbox"/>

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	AL.C	
2	BASE	AL.C	
3	PROCESS CONN.	<input type="checkbox"/> 304 SS <input type="checkbox"/> 316L SS	
4	TUNING FORK	SCS 14	

PROCESS CONN. SIZE	
<input type="checkbox"/>	PT 1-1/2"(M)
<input type="checkbox"/>	

ELECTRICAL SPECIFICATION		
SWITCH	TYPE	RELAY
	FORM	DPDT
	CONTACT RATING	AC 250V, 5A DC 30V, 5A
POWER SOURCE	AC 90...240V, 50/60Hz DC 24V	

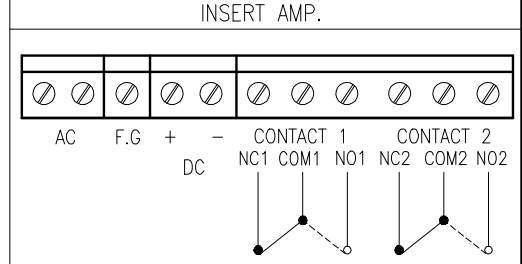

TAG. NO.	Q'TY	REMARK

NOTE
1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED.

						HITROL CO., LTD. TITLE VIBRATION TYPE LEVEL SWITCH HPV-20NH-A	SCALE	UNIT	SHEET NO.	
							N.S	mm		
							PROJECT			
							DRAWING NO.			
								HPV20NHA-A-01		
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY					

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party permission