

L1 STD. LENGTH = 200mm  
 $L \leq 2500\text{mm}$ , A = 170mm, B =  $\phi 28$   
 $L \leq 4500\text{mm}$ , A = 300mm, B =  $\phi 28$   
 $L \geq 4500\text{mm}$ , A = 300mm, B =  $\phi 40$

NOTE  
 1. GENERAL TOLERANCE :  
 $\pm 3\text{mm}$  EXCEPT AS NOTED

FOR	TWO-PART TYPE LEVEL SWITCH
MOUNTING	TOP , SCREW
ENCLOSURE	WEATHER PROOF (IP65)
MAX. PRESSURE	20 kgf/cm <sup>2</sup>
MAX. TEMP	150 °C


CONTROL UNIT	
MODEL NO. : HLC-95R	PANEL TYPE(STD.) LOCAL TYPE

CABLE ENTRY	PF 3/4"(F) <input type="checkbox"/>
-------------	--

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	AL.C	
2	BASE	AL.C	
3	PROCESS CONN.	316L SS	
4	INSULATION	TEFLON	1 t
5	ROPE HOLDER	316L SS	
6	ROPE	316L SS	$\phi 8$
7	SENSING WEIGHT	316L SS	
8	COOLING FIN	304 SS	

PROCESS CONN. SIZE	
<input type="checkbox"/>	PT 1" SCREW
<input type="checkbox"/>	

TAG. NO.	QT'Y	L1	L

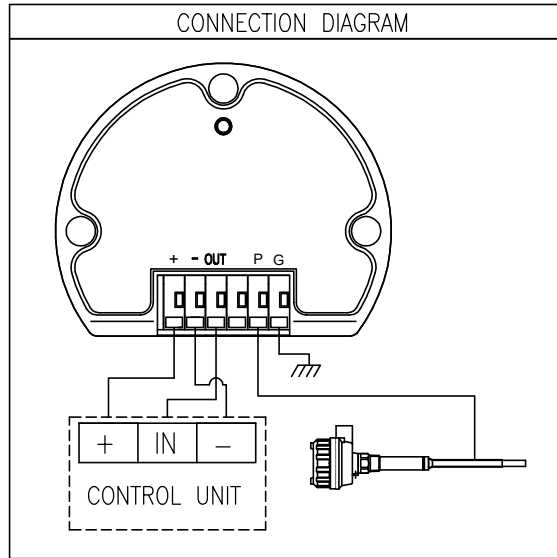

	.	.			
	.	.			
	.	.			
	.	.			
	FEB. 2018	1ST ISSUE	D Y KIM	B S SUNG	Y H KIM
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY

**HITROL** HITROL CO., LTD.  
 TITLE  
**CAPACITANCE TYPE LEVEL SWITCH  
 FOR SOLIDS HCC-95RWH**

SCALE	UNIT	SHEET NO.
N.S	mm	/
PROJECT		
DRAWING NO. HCC95RWH-A-01		

This drawing is the property of HITROL and shall not be copied, communicated, or given for tiers except with our written permission