


FOR	DIGITAL TYPE LOCAL INDICATOR
MOUNTING	"U" BOLT or M10 BOLT
ENCLOSURE	Ex-PROOF (Ex d IIC T6, IP65)
AMBIENT TEMP.	-20 ~ +60 °C
INPUT POWER	DC 24V 2-Wire Loop Power
COMBINATION UNIT	DC 4~20mA 2-Wire Transmitter
VOLTAGE DROP	Max. 5V
ACCURACY	±0.2% F.S

CABLE ENTRY	PF 1/2"(F)
	<input type="checkbox"/>

NO.	DESCRIPTION	MATERIAL	REMARK
1	COVER	AL.C	
2	BASE	AL.C	
3	BRACKET	304 SS	2 t

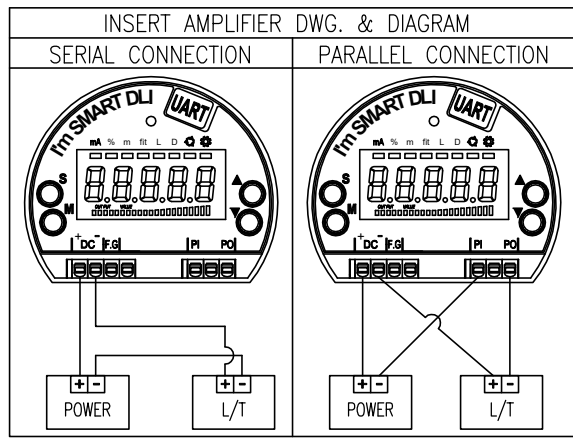

TAG NO.	Q'TY

NOTE  
1. GENERAL TOLERANCE ±3mm EXCEPT AS NOTED.

	.	.				HITROL CO., LTD. TITLE DIGITAL TYPE LOCAL INDICATOR HI-100D-Ex	SCALE	UNIT	SHEET NO.
	.	.					N.S	mm	/
	.	.					PROJECT		
	FEB. 2018	1ST ISSUE	D Y KIM	B S SUNG	Y H KIM		DRAWING NO. HI100DEx-A-01		
NO.	DATE	REVISION	REV'D BY	CHK'D BY	APP'D BY				

This drawing is the property of HITROL and shall not be copied, communicated, or given for third-party except with our written permission.